KOLLEZİ

WALL

WWW.KOLLEZI.COM

O WALL

Technical Information

*Valid valve and rough-in position before installation

In-wall conceal tank.....Metal frame
Bearing capacity.....400 kg | 880 lb
Residential installation....2"x4"& 6" stud wall
Flush type.....Dual flush
Water consumption.....0.8/1.6 GPF | 3/6 LPF
Flush action.....Gravity flush down
Outlet pipe.....Ø 4" | 100 mm
Inlet pipe.....Ø 2" | 50mm
Rough-in.....In-wall floor
Mounting holes.....7-9" | 180-230 mm
Dual flush button K4117.....Included
Warranty...5 years metal frame / 1 year parts
All product dimensions are nominal

Information Technique

*Valider la position de la valve d'alimentation et la plomberie brute avant l'installation

Système de réservoir mural.....Cadre de métal
Capacité portante.....400 kg | 880 lb
Installation résidentielle.....2"x4"& 6" Colombage
Type de chasse .....Double chasse
Consommation d'eau.....0.8/1.6 GPF | 3/6 LPF
Fonction de chasse.....Gravité directe
Tuyau de décharge.....Ø 4" | 100 mm
Tuyau d'entrée .....Ø 2" | 50 mm
Installation/plomberie brute.....Plancher mural
Trous d'installation.....7-9" | 180-230 mm
Boutton de chasse duo K4117.....Inclus
Garantie.....5 ans support de métal / 1 an pieces
Toutes les dimensions sont nominales

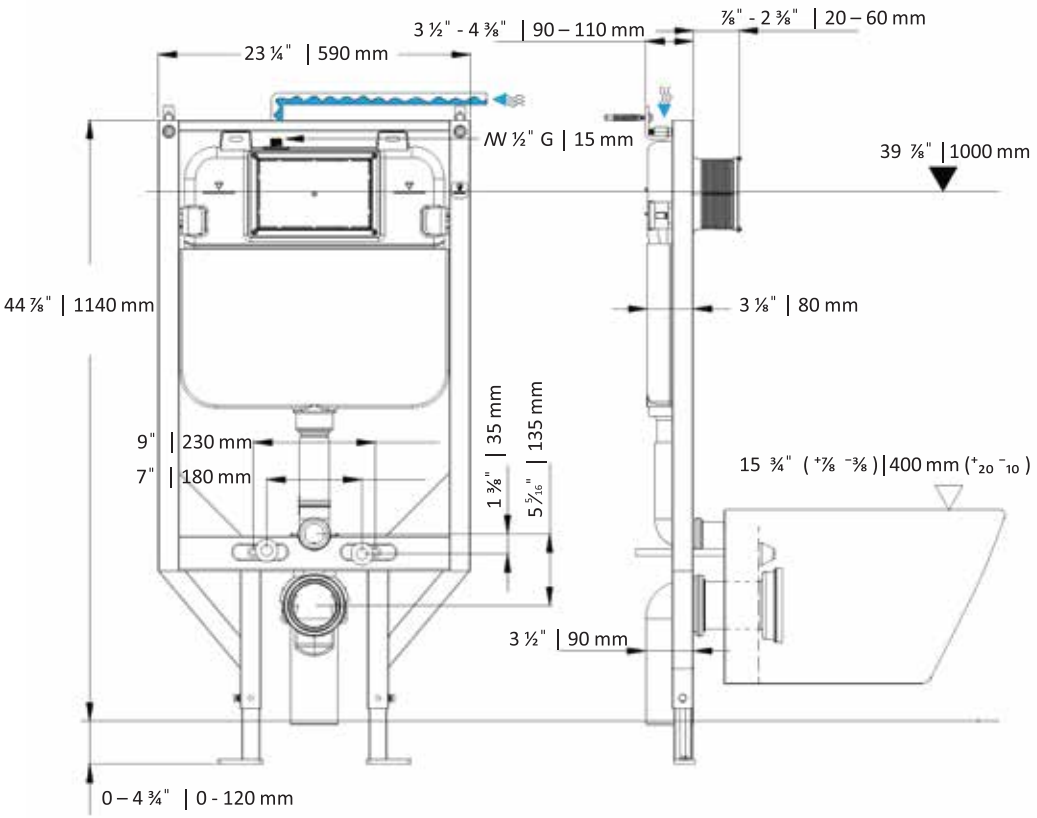

Vertical discharge
Évacuation verticale



Connecting pipe
Tuyau de transit



Straight pipe
Tuyau droit



01-03-2024